

# Bath Lift JC35M3



Data sheet

## Bath Lift JC35M3

### Features







- Collapsible, portability, easy to carry
- Powerful battery can operate more than 10 cycles
- Can recline to 45° for user's comfortable enjoyment




### Technical specifications

|                                |             |
|--------------------------------|-------------|
| Input voltage (VDC)            | 14.8        |
| Max load (N)                   | 1400        |
| Load speed (mm)                | 5           |
| Min height (mm)                | 80          |
| Max height (mm)                | 487         |
| IP grade                       | IPX8        |
| Voltage of the charger ( VAC ) | 110-240     |
| Packaging                      | 780*480*310 |
| Weight                         | 13KG        |


## Dimension

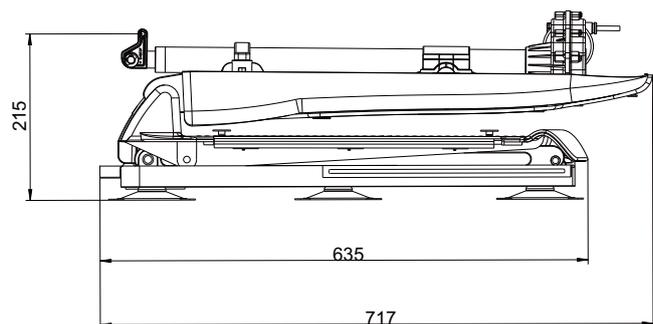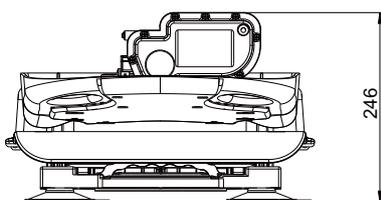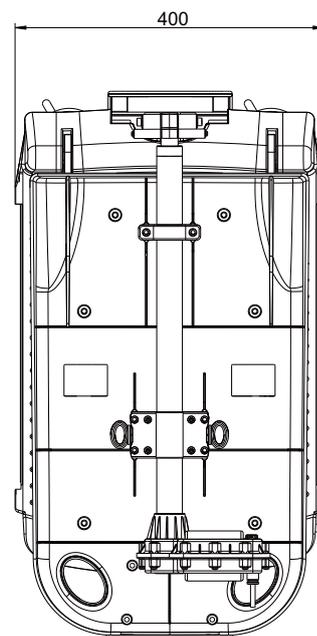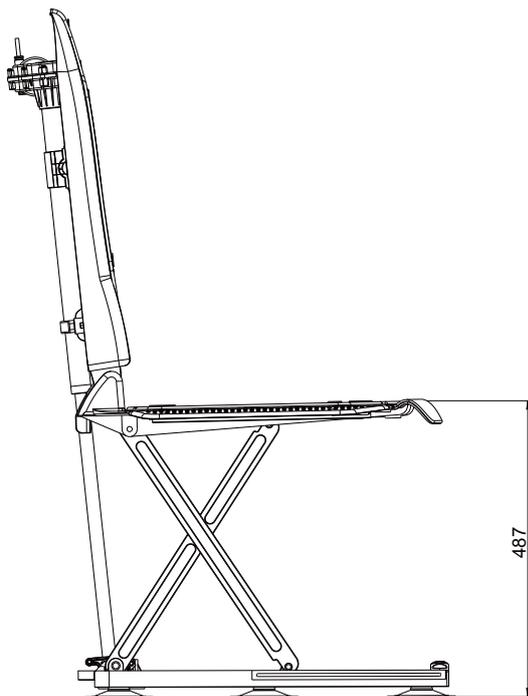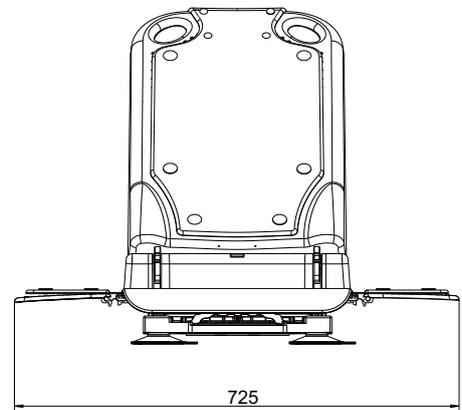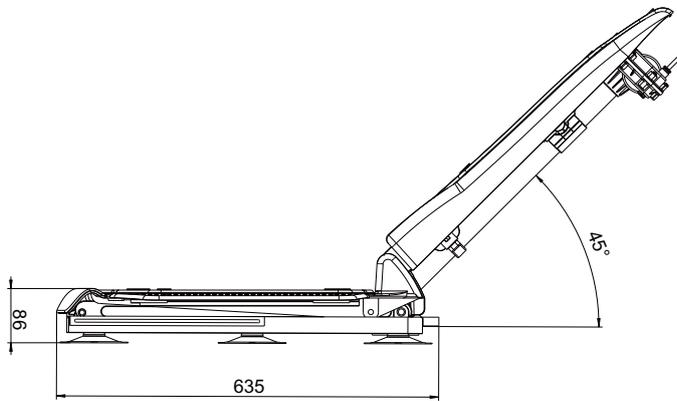


**Sucker specification**

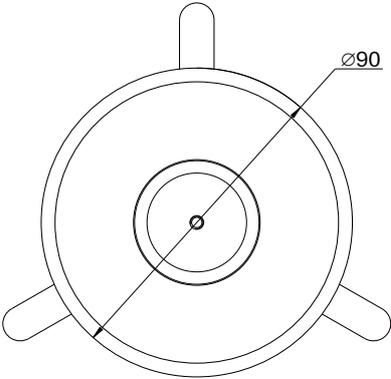

JC35L21 sucker (big)

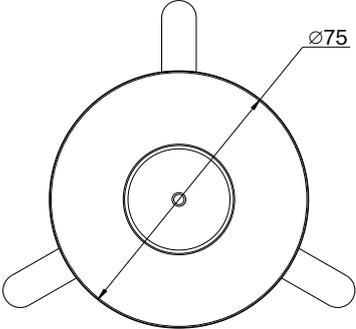

JC35M3 sucker

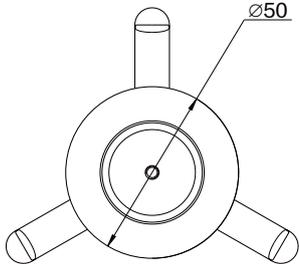

JC35L21 sucker (small)

## Order Key Example

|                            |        |  |
|----------------------------|--------|--|
| Type                       | JC35M3 |  |
| Actuator specification     | X      | 0=without actuator<br>1= JC35L21 with CNLINKO waterproof female plug   |
| Chair frame specifications | X      | 0= without chair frame<br>1= with common chair frame<br>2= with Heightening chair frame  |
| Cushion color              | X      | 0 = without cushion<br>1= with blue cushion<br>2= with white cushion<br>3= with orange cushion   |
| Charger specification      | X      | 0= without charger<br>1= English charger with CNLINKO waterproof female plug<br>2=European charger with CNLINKO waterproof female plug<br>3=American charger(UL) with CNLINKO waterproof female plug<br>4=Austrilian charger (SAA)with CNLINKO waterproof female plug  |
| Handset specification      | X      | 0=handset with CNLINKO waterproof female plug<br>1=handset with CNLINKO waterproof female plug with American SB custom logo  |
| Packing specification      | XX     | 0=without packing<br>1= packing with Jieclang logo<br>2=with UK Elixir custom packing<br>3=with Japanese custom packing<br>4=with American SB custom packing   |
| Instructions               | X      | 0= without instruction<br>1=with Jieclang blue Chinese instruction<br>2=with Jieclang blue English instruction<br>3=with Jieclang white Chinese instruction<br>4=with Jieclang white English instruction<br>5=with UK Elixir custom instruction<br>6= with Russian custom instructions<br>7=with Japanese custom instruction<br>8= with American Platinum custom instruction<br>9= with American SB custom instruction<br>10=with Canadian bilingual instruction |
| Sucker specification       | X      | 0=JC35L21 sucker (small)<br>1= M3 sucker<br>2=JC35L21 sucker (big)   |

## Application case

